

ThinkPHP

PHP

ThinkPHP

1 11 ThinkPHP

ThinkPHP5.0.0~5.0.23

<https://blog.thinkphp.cn/910675>

ThinkPHP5.0.x 5.0.24

Request

method

ThinkPHP5.0.x 5.0.24

ThinkPHP5.0.x

5.0.24


thinkphp\base.php

```
1 <?php
2 // -----
3 // | ThinkPHP [ WE CAN DO IT JUST THINK ]
4 // -----
5 // | Copyright (c) 2006-2018 http://thinkphp.cn All rights reserved.
6 // -----
7 // | Licensed ( http://www.apache.org/licenses/LICENSE-2.0 )
8 // -----
9 // | Author: liu21st <liu21st@gmail.com>
10 // -----
11
12 define('THINK_VERSION', '5.0.22');
13 define('THINK_START_TIME', microtime(true),
```

ThinkPHP5.0.22

The screenshot shows a network request and response in a browser's developer tools. The 'Request' tab is selected, showing the raw request data. The 'Response' tab is also visible, showing the raw response data. The response headers include:

- Server: ThinkPHP/5.0.22
- Content-Length: 76

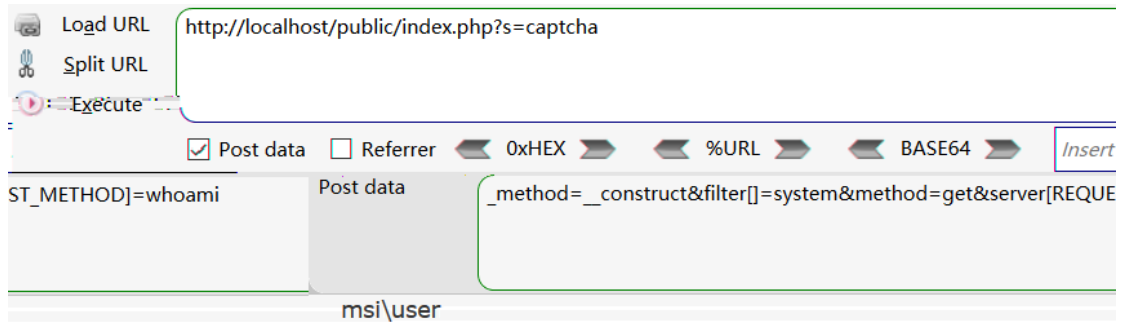

页面错误! 请稍后再试~

ThinkPHP V5.0.22 { 十年磨一剑-为API开发设计的高性能框架 }

ThinkPHP 5.0.24

ThinkPHP5 Composer

application cmd

```
composerupdatethink/framework5.0.24  
composerupdatethink/framework=5.0.24  
composerupdatethink/framework: 5.0.24
```

ThinkPHP5

<https://www.kancloud.cn/manual/thinkphp5/163239>

Request

method

ThinkPHP

Request

Request

<https://github.com/top-think/framework/commit/4a4b5e64fa4c46f851b4004005bff5f3196de003>

\thinkphp\library\think\Request.php

525 526

```
$this->method=strtoupper($_POST[Config::get('var_method')]);  
};  
$this->{$this->method}($_POST);
```

```
$method=strtoupper($_POST[Config::get('var_method')]);  
if(in_array($method, ['GET', 'POST', 'DELETE', 'PUT', 'PATCH']))  
{  
    $this->method=$method;  
    $this->{$this->method}($_POST);  
}
```